

7744/7788

NEW!

RF Subscriber Unit

UL Fire, AA Burglary and NFPA-72 Compliant

UL Listed


UL Listed Central Station

Remote Station

864 Ed. 9, 827, 1610, 365, 681

CSFM

NFPA
RF Section 8.6.3.5

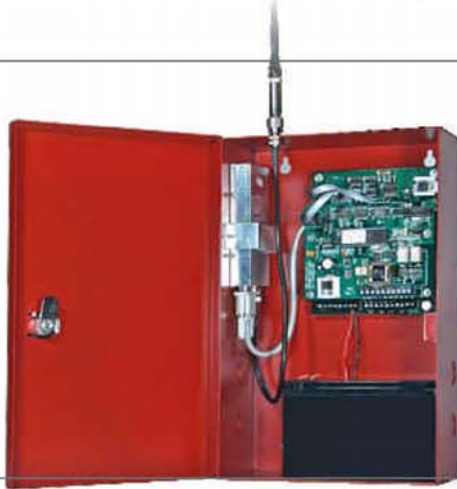

Advanced Wireless Alarm Monitoring

The 7744/7788 smart subscriber unit links an alarm panel to an alarm monitoring central station. This 2-way transceiver and repeater in one is housed in a full size locking steel cabinet for superior performance. The 7744/7788 supports a wide range of inputs such as NO/NC/EOL and direct voltage. It automatically senses wire and antenna cuts, and monitors battery and AC power status. Advanced status reporting, self-diagnostics and a built-in power supply make the 7744/7788 the first choice for all wireless alarm communication needs.

Full Data for Fire and Burglary

Use with the optional FireTap for full fire data or the IntelliTap for full fire and burglary data.

Available Configurations

7744 – 4 reversing polarity inputs plus 4 programmable EOL inputs


7788 – Programmable EOL inputs with 8 zones

Available Options

FireTap 7770
IntelliTap 7067
NEMA 4 Enclosure
High Gain Antenna
Additional Back Up Battery
Available in Burglary Beige or Fire Red



- Options for Full Data for Fire and Burglary
- Available in 7744 & 7788 Zone Configurations
- Built-in Power Supply and Battery Charger
- Local Annunciation Options on Board

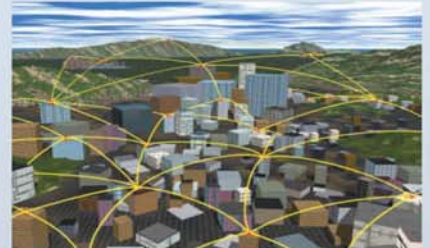

Wireless mesh networking is an innovative technology adopted by many industries with applications that need to communicate data over a large geographic area with a high level of reliability at a low total cost of ownership.

The advanced design and 2-way communications capability provides easy installation, expansion, and management when compared to alternative communication methods, both wired and wireless.

RF Subscriber Unit

Technical Specifications

Radio

Standard CSAA frequency ranges:
450-470 MHz and 130-174 MHz, VHF
and UHF. Others available

Standard Output Power

2 watts (requires FCC license)

Power Input

16.5 VAC, 40VA UL listed
Class II transformer required

Voltage

12 VDC nominal

Current

175mA standby; 800mA transmit

Alarm Signal Inputs

- 4 individually programmable Zones:
NO/NC/EOL, trouble restore
- RS-232
- Reversing voltage (7744 only) 12 or
24 VDC

Operating Temperature Range

0° to 50°C, 32° to 122°F

Storage Temperature Range

-10° to 60°C, 14° to 140°F

Relative Humidity Range

0-85% RHC non-condensing

Back up Battery

12V, 7 AH

Low Battery Reporting

22.5-minute test cycle

AC Status

Reports to central station after
approximately 60 minutes without AC
power, reports power restored after
approximately 60 minutes of restored
power. programmable from 60 to 180
minutes

Antenna Cut (local reporting)

Form 'C' Contact 1 AMP

Size

13.25"H x 8.5"W x 4.3"D
34cm x 21.5cm x 11cm

Weight

6.4 lbs, 2.9 Kilograms
(excluding battery)

Colors

Available in standard
Burglary Beige or Fire Red
Please specify when ordering

Available Options

- 7788 RF subscriber unit
with 8 EOL inputs
 - 7744 RF subscriber unit with 4 EOL
inputs and 4 reverse polarity inputs
 - 7770 - FireTap
 - 7067 - IntelliTap
 - NEMA 4 Enclosure
- Please specify when ordering

Available configurations

- 7788, 8 EOL inputs
- 7744, 4 EOL inputs w/4
reverse polarity inputs



CENTRAL ALERT, INC.
sales@centralalert.net
(972) 488-6887
13515 Bee Street
Dallas, TX 75234

